



## UPR Oil Catch Can Installation

5028-76 / 5028-268

1. Remove the factory PCV hose from the rubber connectors that attaches it to the intake and throttle body. These can be tough, and you might need to twist them or slide a small screwdriver in between the hard plastic line and the rubber connector to break them free.
2. You will twist the rubber connector at the throttle body to face the front passenger side fender so it can line up with the catch can vacuum hose. Install the supplied UPR Nickel Hose Barbs into the rubber connectors.

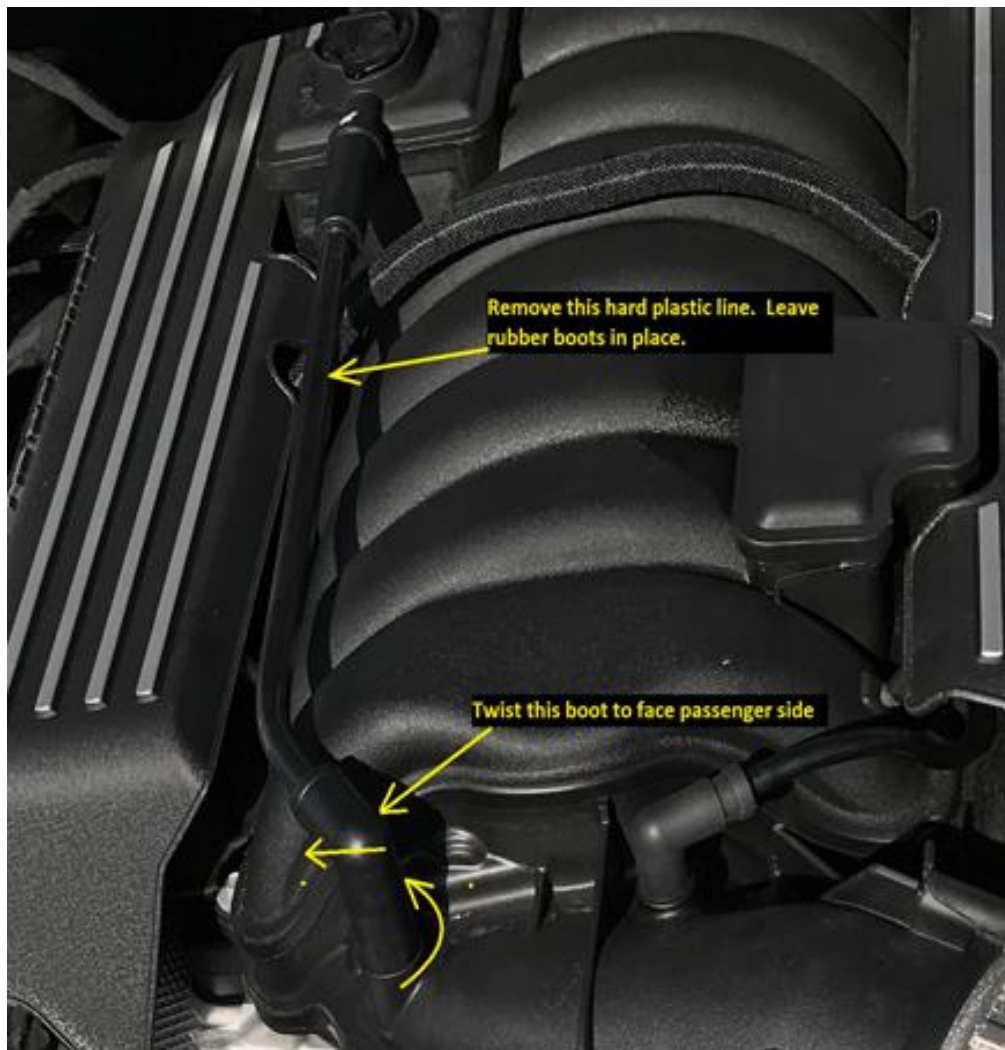

3. Install the catch can bracket onto the ECU mount as shown. You may need to loosen the ECU from the factory bracket to make room for the hardware, then retighten the ECU to the bracket. **(FOR Years 2018-up)** insert the Fuse Panel Cover mounting tabs as shown. Install cover onto the tabs.

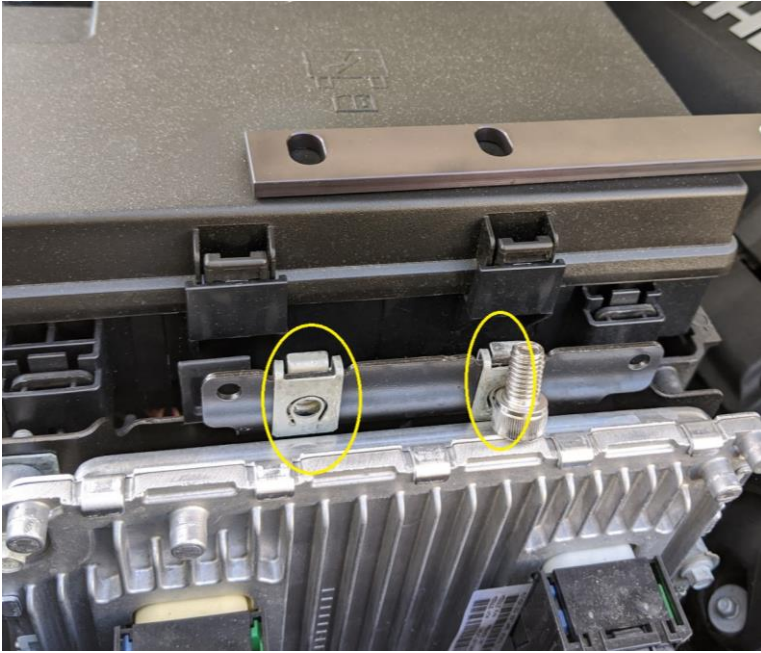

4. The outlet side of the catch can will be indicated by a silver ring on the end of the fitting (vacuum). Connect one hose from this side of the catch can to the rubber connector at the throttle body (5.7L engines will have the vacuum fitting on the side of the intake manifold). The hose from the opposite side of the catch can will connect to the rubber connector at the rear of the intake manifold (PCV). Route the hoses away from any hazards like belts, pulleys, or exhaust components.



5. The Plug and Play fittings at the catch can are installed by simply pushing them onto the catch can fittings until they click. To remove them, just push the button on the side of the fitting to release it, and slide it off. Do not pry the clips from the Plug and Play fittings as this will destroy the clip and cause leaks.



When emptying the catch can, unscrew the bottom cup of the can and properly dispose of the oil, fuel, water, mixture that has collected. NEVER RETURN THIS MIXTURE TO THE ENGINE. Screw the catch can cup back on just snug to the body of the catch can - never over tighten it as the interference fit with the face mounted O rings is designed to just be snugged for easy maintenance. Always be sure to grip the top of the catch can when loosening or tightening the bottom.



750 Eastcoast St South • Lake Worth, FL 33460  
561-588-6630 • Fax: 561-585-4141  
[www.uprproducts.com](http://www.uprproducts.com) • [sales@uprproducts.com](mailto:sales@uprproducts.com)

---

Always check and drain the catch can more often in winter / freezing weather. If the water/oil mixture in the catch can is allowed to freeze it will cause damage to the catch can and internal components. Any damage due to freezing is NOT WARRANTY. You must dispose of the liquid collected in the catch can properly (with used waste oil) properly according to your local laws.

*Product Liability Statement: The purchase of the product, manufactured by UPR Products Inc. completes an agreement between UPR Products Inc. and the customer. UPR Products Inc. assumes no liability for damages or injury incurred by the buyer of this product. The purchaser or user of this product is responsible for the proper disposal of any hazardous materials (oil catch can contents). The buyer has complete responsibility for the installation, use and upkeep of this product.*

***Be sure to shop our online store for the best deals: [www.uprproducts.com](http://www.uprproducts.com)***