


## UPR Oil Catch Can Installation

### Hellcat, Demon, Redeye Single Valve Catch Can Kit 5030-241 (241-1)



1. To install the UPR Single Valve Catch Can kit for the Hellcat/ Demon/ Redeye , you will need a 14mm wrench and a 5/32nds Allen key.

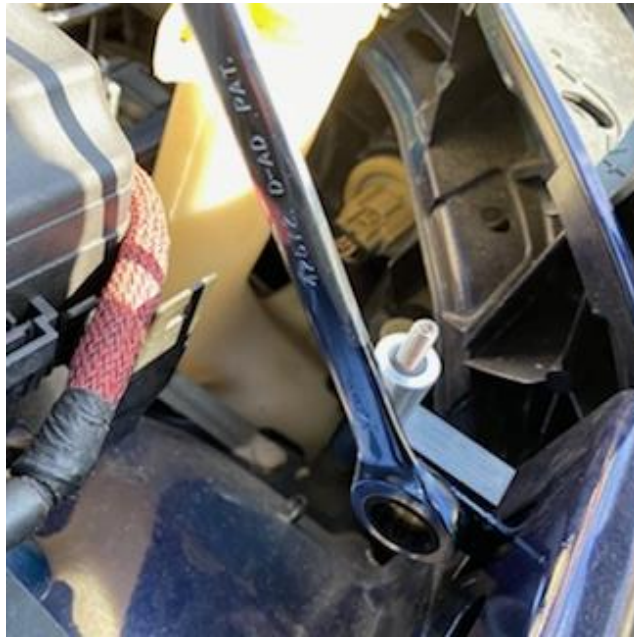

2. Locate the un used tab on the passenger inner fender well. Install the UPR Fender Mount bracket as shown. (For Export Models, you may need to move the sensor to the other side of the tab).

***Be sure to shop our online store for the best deals: [www.uprproducts.com](http://www.uprproducts.com)***



3. Remove the factory hose that connects the PCV valve on the passenger side valve cover to the vacuum port on the supercharger. The UPR vacuum hose will have a check valve in it. Route the hose under the fuse panel power cable so that the arrow on the check valve points towards the engine. Connect the hose at the supercharger by pushing the Plug N Play fitting on until it clicks.



4. The UPR Catch Can kit comes with a quick release knob for the catch can mount. The lanyard on the knob prevents the knob from falling down into the unreachable parts of the engine compartment if it is dropped. Secure the lanyard by pulling the plastic harness clip up, pushing the lanyard eyelet on, and reinstalling the clip.



5. Set the Catch Can in place over the Fender Mount stud and secure it with the knob. Leave the knob slightly loose until the hoses are connected.



6. Connect the vacuum hose to the side fitting on the catch can. The UPR Plug N Play fittings will click when seated.



7. Connect the final hose to the PCV fitting on the valve cover. The hose will connect to the top fitting on the catch can. Tighten the UPR quick release knob, and reinstall the engine cover.



Inspect the catch can every 500 miles until you have a good idea as to the needs of your engine. In most cases, the catch can will have 3 to 4 ounces every 2500 to 3000 miles. There will be less in the hot summer months, and more in the cool winter months.

Always check and drain the catch can more often in winter / freezing weather. If the water/oil mixture in the catch can is allowed to freeze it will cause damage to the catch can and internal components. Any damage due to freezing is NOT WARRANTY.

***Be sure to shop our online store for the best deals: [www.uprproducts.com](http://www.uprproducts.com)***



750 Eastcoast St South • Lake Worth, FL 33460  
561-588-6630 • Fax: 561-585-4141  
[www.uprproducts.com](http://www.uprproducts.com) • [talktoup@uprproducts.com](mailto:talktoup@uprproducts.com)

---

*Product Liability Statement: The purchase of the product, manufactured by UPR Products Inc. completes an agreement between UPR Products Inc. and the customer. UPR Products Inc. assumes no liability for damages or injury incurred by the buyer of this product. The buyer has complete responsibility for the installation, use and upkeep of this product.*

***Be sure to shop our online store for the best deals: [www.uprproducts.com](http://www.uprproducts.com)***